


4K@60/HDCP 2.2 HDMI Audio De-/Embedder

UHDS-01

<User Guide>

Ver.1.5.0

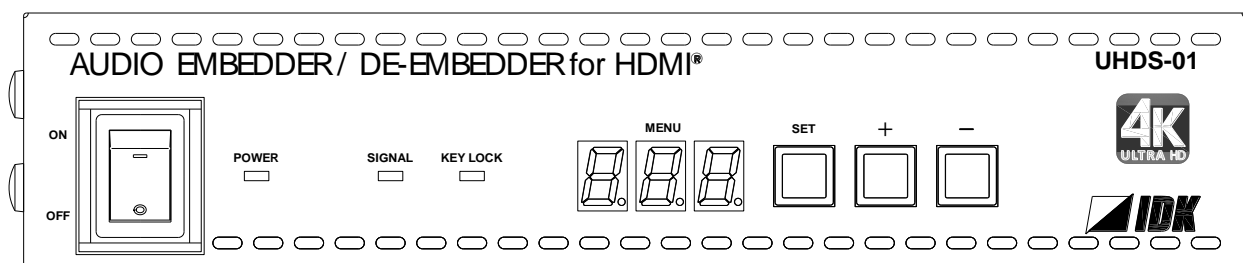

- Thank you for choosing our product.
- To ensure the best performance of this product, please read this user guide fully and carefully before using it and keep this manual together with the product for future reference as needed.

Trademarks

- HDBaseT™ and the HDBaseT Alliance Logo are trademarks of the HDBaseT Alliance.
- The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.
- SDVoE™ and SDVoE logo are trademarks of SDVoE Alliance.
- All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified.
- ©2016 IDK Corporation, all rights reserved.

Before reading this manual

- All rights reserved.
- Some information contained in this User guide such as exact product appearance, diagrams, menu operations, and so on may differ depending on the product version.
- This User guide is subject to change without notice. You can download the latest version from IDK's website at: www.idkav.com

FCC STATEMENT

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

(Class A)

**Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information**

Unique Identifier

Type of Equipment: DISTRIBUTION AMPLIFIER FOR HDMI

Model Name: UHDS-01

Responsible Party – U.S. Contact Information

Company Name: IDK America Inc.

Address: 72 Grays Bridge Road Suite 1-C, Brookfield, CT 06804

Telephone number: +1-203-204-2445

URL: www.idkav.com

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(FCC SDoC)

CE MARKING

This equipment complies with the essential requirements of the relevant European health, safety and environmental protection legislation.

WEEE MARKING



Waste Electrical and Electronic Equipment (WEEE), Directive 2002/96/EC
(This directive is only valid in the EU.)



This equipment complies with the WEEE Directive (2002/96/EC) marking requirement.







The left marking indicates that you must not discard this electrical/electronic equipment in domestic household waste.

Safety Instructions

Read all safety and operating instructions before using this product. Follow instructions and heed warnings/cautions.


Instructions and warnings/cautions for all products are provided. Some of them may not be applicable to your product.

 Warning	Indicates the presence of a hazard that may result in death or serious personal injury if the warning is ignored or the product is handled incorrectly.
 Caution	Indicates the presence of a hazard that may cause minor personal injury or property damage if the caution is ignored or the product is handled incorrectly.


Symbol	Description	Example
 Caution	This symbol is intended to alert the user. (Warning and caution)	 Hot surfaces Caution
 Prohibited	This symbol is intended to prohibit the user from specified actions.	 Do not disassemble
 Instruction	This symbol is intended to instruct the user.	 Unplug

Warning


For lifting heavy products:

 Instruction	<ul style="list-style-type: none"> • Lifting must be done by two or more personnel. <p>To avoid injury: When lifting the product, bend your knees, keep your back straight and get close to it with two or more persons.</p>
----------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------





For installing and connecting products:

 Prohibited	<ul style="list-style-type: none"> • Do not place the product in unstable place. <p>Install the product in a horizontal and stable place, as this may fall or tip over and cause injury.</p> <ul style="list-style-type: none"> • Secure the product if installing in the locations with vibration. <p>Vibration may move or tip over the product unexpectedly, resulting in injury.</p>
---------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


Warning

 Instruction	<ul style="list-style-type: none"> ● Installation work must be performed by professionals. The product is intended to be installed by skilled technicians. For installation, please contact a system integrator or IDK. Improper installation may lead to the risk of fire, electric shock, injury, or property damage. ● Insert the power plug into an outlet that is unobstructed. Unobstructed access to the plug enables unplugging the product in case of any extraordinary failure, abnormal situation or for easy disconnection during extended periods of non-use. ● Insert the power plug into an appropriate outlet completely. If the plug is partially inserted, arcing may cause the connection to overheat, increasing the risk of electric shock or fire. Do not use a damaged plug or connect to a loose outlet. ● Unplug the product from an AC power source during installation or service. When connecting peripheral devices to this product, unplug all involved devices from outlets. Ground potential differences may cause fire or other difficulties. ● The product must be electrically earthed/grounded. To reduce the risk of electric shock, ensure the product is connected to a mains socket outlet with a protective earthing connection. ● For PoE/PoH, use category cables meeting IEEE802.3af/at. Otherwise, it may cause problems or a fire.
---------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

For operating products:

 Prohibited	<ul style="list-style-type: none"> ● Keep out any foreign objects. To avoid fire or electric shock, do not permit foreign objects, such as metal and paper, to enter the product from vent holes or other apertures. ● For power cable/plug and Category cable, <ul style="list-style-type: none"> • Do not scratch, heat, or modify, including splicing or lengthening them. • Do not pull, place heavy objects on them, or pinch them. • Do not bend, twist, tie or clamp them together forcefully. <p>Misuse of the power cable and plug may cause fire or electric shock. If power cables/plugs become damaged, contact your IDK representative.</p>
 Do not disassemble	<ul style="list-style-type: none"> ● Do not repair, modify or disassemble. Since the product includes circuitry that uses potentially lethal, high voltage levels, disassembly by unauthorized personnel may lead to the risk of fire or electric shock. For internal inspection or repair, contact your IDK representative.
 Do not touch	<ul style="list-style-type: none"> ● Do not touch the product and connected cables during electric storms. Contact may cause electric shock.
 Instruction	<ul style="list-style-type: none"> ● Clean the power plug regularly. If the plug is covered in dust, it may increase the risk of fire.




If the following problem occurs:

 Unplug	<ul style="list-style-type: none"> ● Unplug immediately if the product smokes, makes unusual noise, or produces a burning odor. ● Unplug immediately if the product is damaged by falling or having been dropped. ● Unplug immediately if water or other objects are directed inside. <p>If you continue to use the product under these conditions, it may increase the risk of electric shock or fire. For maintenance and repair, contact your IDK representative.</p>
------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



Caution

For installing and connecting products:

 <p>Prohibited</p>	<ul style="list-style-type: none"> ● Do not place the product in a location where it will be subjected to high temperatures. If the product is subjected to direct sunlight or high temperatures while under operation, it may affect the product's performance and reliability and may increase the risk of fire. ● Do not store or operate the product in dusty, oil smoke filled, or humid place. Placing the product in such environment may increase the risk of fire or electric shock. ● Do not block the vent holes. If ventilation slots are blocked, it may cause the product to overheat, affecting performance and reliability and may increase the risk of fire. ● Do not place or stack heavy items on the product. Failure to observe this precaution may result in damage to the product itself as well as other property and may lead to the risk of personal injury. ● Do not exceed ratings of outlet and wiring devices. Exceeding the rating of an outlet may increase the risk of fire and electric shock.
 <p>No wet hands</p>	<ul style="list-style-type: none"> ● Do not handle power plug with wet hands. Failure to observe this precaution may increase the risk of electric shock.
 <p>Instruction</p>	<ul style="list-style-type: none"> ● Use and store the product within the specified temperature/humidity range. If the product is used outside the specified range of temperature and humidity continuously, it may increase the risk of fire or electric shock. ● Do not place the product at elevations of 1.24 mi. (2,000 m) or higher above sea level. Failure to do so may shorten the life of the internal parts and result in malfunctions. ● When mounting the product into the rack, provide sufficient cooling space. Mount the product in a rack meeting EIA standards, and maintain spaces above and below for air circulation. For your safety as required, attach an L-shaped bracket in addition to the panel mount bracket kit to improve mechanical stability. ● Never insert screws without the rubber feet into the threaded holes on the bottom of the product. Never insert screws alone into the threaded holes on the bottom of the product. Doing so may lead to damage when the screws contact electric circuitry or components inside the product. Reinstall the originally supplied rubber feet using the originally supplied screws only.

For operating products:





 <p>Hot surfaces Caution</p>	<p>For products with the hot surfaces caution label only:</p> <ul style="list-style-type: none"> ● Do not touch the product's hot surface. <p>If the product is installed without enough space, it may cause malfunction of other products. If you touch product's hot surface, it may cause burns.</p>
 <p>Prohibited</p>	<ul style="list-style-type: none"> ● Use only the supplied power cable and AC adapter. ● Do not use the supplied power cable and AC adapter with other products. <p>If non-compliant adapter or power cables are used, it may increase the risk of fire or electric shock.</p>
 <p>Unplug</p>	<ul style="list-style-type: none"> ● If the product won't be used for an extended period of time, unplug it. <p>Failure to observe this precaution may increase the risk of fire.</p> <ul style="list-style-type: none"> ● Unplug the product before cleaning. <p>To prevent electric shock.</p>
 <p>Instruction</p>	<ul style="list-style-type: none"> ● Do not prevent heat release. <p>If cooling fan stops, power off the product and contact IDK. Failure to do so may raise internal temperature and increase the risk of malfunction, fire, or electric shock.</p> <ul style="list-style-type: none"> ● Keep vents clear of dust. <p>If the vent holes near the cooling fan or near the fan are covered with dust, internal temperatures increase and may increase the risk of malfunction. Clean the vent holes and near the fan as needed. If dust accumulates inside of the product, it may increase the risk of fire or electric shock. Periodic internal cleaning, especially before humid rainy season, is recommended. For internal cleaning, contact your IDK representative.</p>

Table of Contents


1	Included items.....	11
2	Product outline.....	12
3	Features.....	13
4	Part names and descriptions.....	14
4.1	Front panel.....	14
4.2	Rear panel.....	15
5	Typical application.....	16
6	Precautions before connection.....	17
7	Basic operation.....	18
7.1	Menu operations.....	18
7.2	Locking menu operation keys.....	19
7.3	Initialization.....	19
8	Menus.....	20
8.1	Menu list.....	20
8.2	Setting input and output (Setting menu).....	22
8.2.1	[F01 to F03] Copying EDID.....	22
8.2.2	[F10] Setting EDID resolution.....	23
8.2.3	[F12] Setting external EDID.....	26
8.2.4	[F14] Setting copied EDID.....	26
8.2.5	[F16] No-signal input monitoring.....	27
8.2.6	[F20] Setting Deep Color.....	28
8.2.7	[F22] Setting PCM Audio.....	28
8.2.8	[F24] Setting AC-3 Dolby Digital Audio.....	28
8.2.9	[F26] Setting AAC Audio.....	29
8.2.10	[F28] Setting Dolby Digital Plus Audio.....	29
8.2.11	[F30] Setting DTS Audio.....	29
8.2.12	[F32] Setting DTS-HD Audio.....	30
8.2.13	[F34] Setting Dolby TrueHD Audio.....	30
8.2.14	[F36] Setting Audio channel.....	31
8.2.15	[F38] Copying CEC physical address copy of EDID.....	32
8.2.16	[F42] Setting EDID WXGA.....	32
8.2.17	[F44] Setting External audio input.....	32
8.2.18	[F70] Setting audio output.....	33
8.2.19	[F90] Displaying firmware version.....	33
8.2.20	[F99] Setting maintenance/status display menu.....	33
8.3	Checking operation (Maintenance menu).....	34
8.3.1	[C01] Setting HDCP input.....	34
8.3.2	[C10] Setting how long Hot plug is ignored.....	35
8.3.3	[C20] Setting forced HDMI output mode.....	36
8.3.4	[C30] Setting output mode.....	37
8.4	Displaying input/output statuses (Status display menu).....	38
8.4.1	[L01 to L22] Displaying input information.....	38
8.4.2	[L30 to Lb0] Displaying output information.....	41
9	Specifications.....	43
9.1	Pin assignments.....	43
9.1.1	HDMI Type A connector.....	43
9.2	Product specification.....	44

10 Troubleshooting 45


1 Included items

Make sure all items below are included in the package.

If any items are missing or damaged, please contact us.

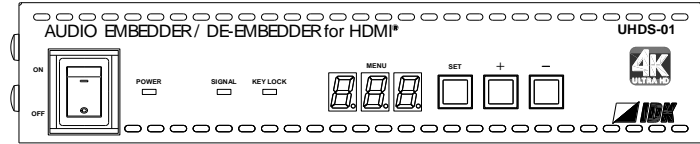

One (1) main unit (UHDS-01)




One (1) power cord, 6 ft. (1.8 m)

[Fig. 1.1] Included items

2 Product outline

The UHDS-01 is an HDMI audio embedder/de-embedder which supports 4K@60 having four times the resolution of full HD and HDCP 2.2 for HDMI output.

The UHDS-01 converts digital audio to analog audio, and it also converts analog audio to digital audio to input to HDMI signals.

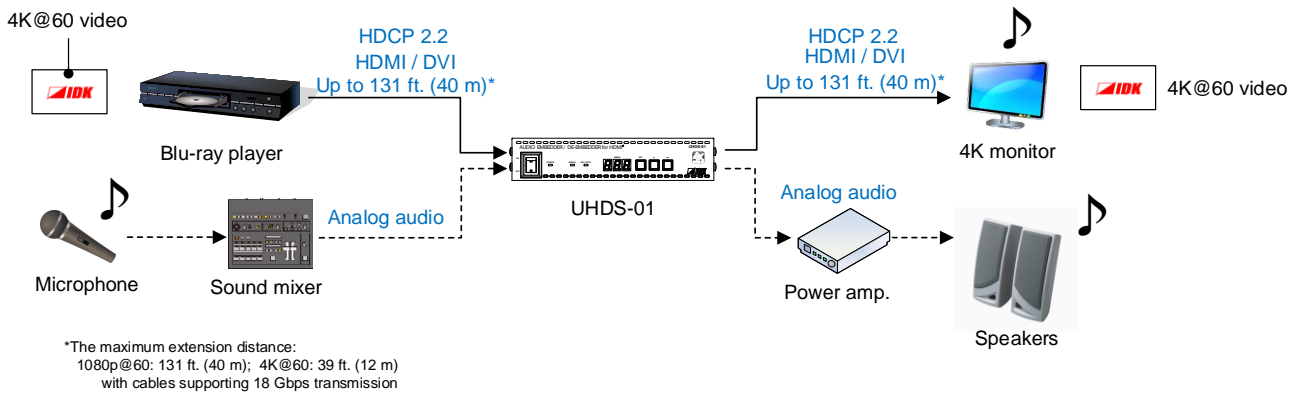

[Fig. 2.1] Distributing video and audio

3 Features

■ Video


- Up to 4K@60 (4:4:4)
- HDCP 1.4/2.2
- HDR
- 3D
- x.v.Color
- Transmission distances:
 - 1080p@60 : Up to 131 ft. (40 m)
 - 4K@60 : Up to 39 ft. (12 m) (When cable supporting 18 Gbps transmission is used)
- Cascade connection
- Anti-snow

■ Audio

- Embedding
- De-embedding

■ Others

- EDID emulation
- DDC buffer
- CEC (Pass-through)
- Displaying I/O signal status
- Connection Reset

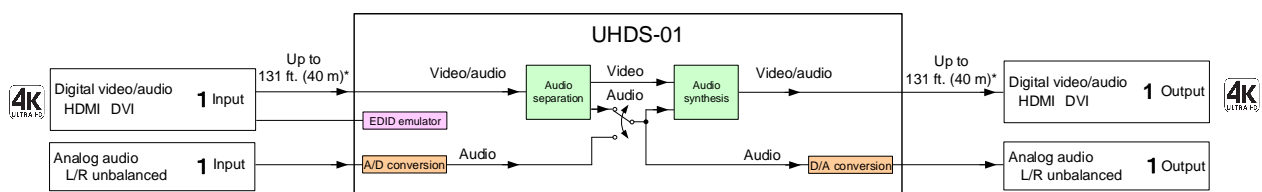


* The maximum extension distance:
 1080p@60: 131 ft. (40 m); 4K@60: 39 ft. (12 m) (with cables supporting 18 Gbps transmission)

[Fig. 3.1] UHDS-01 diagram

4 Part names and descriptions

4.1 Front panel

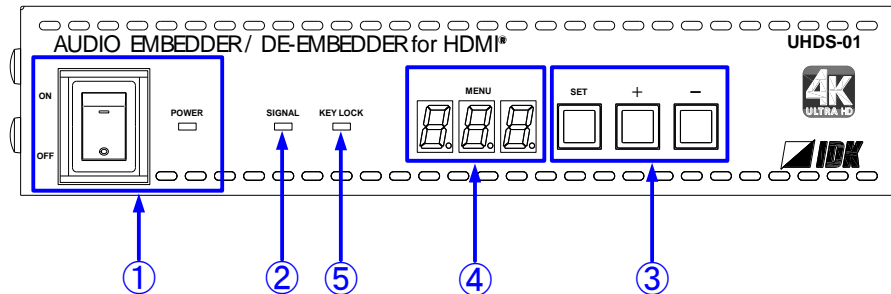


[Fig. 4.1] Panel drawing

[Table 4.1] Part names and descriptions

#	Part name	Description
①	POWER key	Turns on/off the UHDS. The POWER LED lights green when the UHDS is turned on.
②	SIGNAL LED	The LED lights yellow when video input signals are detected.
③	Menu operation keys	Selects and sets each menu.
④	Segment display	Displays menu number, setting number, and setting status.
⑤	KEY LOCK LED	Turns green when the menu operation keys are locked. 【7.2 Locking menu operation keys】

4.2 Rear panel

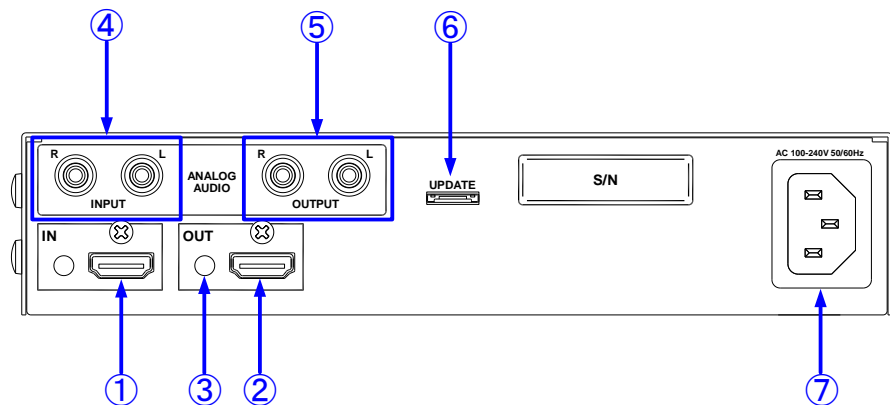


[Fig. 4.2] Panel drawing

[Table 4.2] Part names and descriptions

#	Part name	Description
①	HDMI input connector	Input connector for HDMI signals. Connector for a source device such as a DVD/Blu-ray disc player.
②	HDMI output connector	Output connector for HDMI signals. Connector for sink devices such as LCD monitors and projectors.
③	HDMI cable fixing holes (Not used)	Not used.
④	Audio input connector	Analog audio input connector. Analog audio that is input from this connector will be embedded to HDMI signals if "8.2.17 [F44] Setting External audio input" is set to "on" (analog audio).
⑤	Audio output connector	Analog output for audio of HDMI input signals. Audio selected in "8.2.17 [F44] Setting External audio input" will be output. Connector for an amplifier, speaker, mixer, or the like.
⑥	Connector for maintenance	Not used. Please do not connect anything; this connector is for maintenance only.
⑦	AC adapter connector	Connector for the supplied AC adapter.

5 Typical application

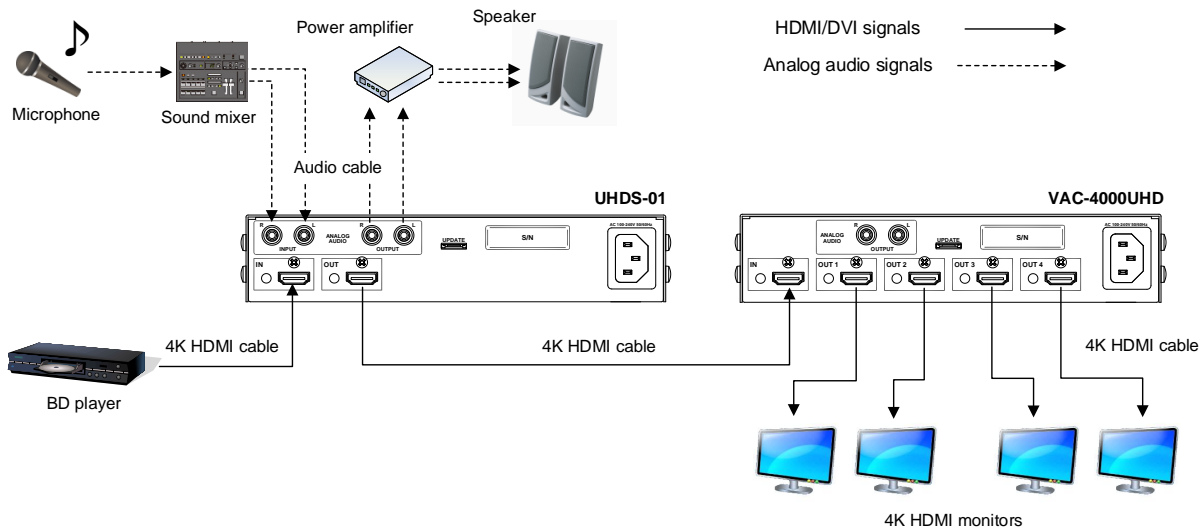

[Fig. 5.1] Cascade connection

At IDK, various cables, such as flexible HDMI cable, DVI cable, high-quality long cables and conversion cables, are available. Please contact us for details as needed.

Use correct HDMI cable /HDMI-DVI conversion cable according to the system configuration. For analog audio, use a commercial audio cable.

For 4K format video (4K@60 except for YCbCr 4:2:0), the maximum TMDS data rate (transmission rate) is 18 Gbps. If you use a high-speed HDMI cable, the rate becomes 10.2 Gbps and video cannot be displayed stably.

Use a cable supporting 18 Gbps high-speed transmission according to the 4K format. Since extension distance depends on the cable type and characteristics of source and sink devices, we recommend that you use a high-quality cable.

[Table 5.1] Cables for 4K format

	TMDS data rate (Gbps)								
	RGB, YCbCr 4:4:4			YCbCr 4:2:2			YCbCr 4:2:0		
4K format	24 bit	30 bit	36 bit	24 bit	30 bit	36 bit	24 bit	30 bit	36 bit
3840x2160p (24/25/30)	HS	UH	UH	HS	HS	HS	NA	NA	NA
4096x2160 (24/25/30)	HS	UH	UH	HS	HS	HS	NA	NA	NA
3840x2160p (50/59.94/60)	UH	NA	NA	UH	UH	UH	HS	UH	UH
4096x2160 (50/59.94/60)	UH	NA	NA	UH	UH	UH	HS	UH	UH

UH: 18 Gbps ultra-high-speed cable HS: 10.2 Gbps transmission cable NA: Not available

Note:

If cables are extended using a cable joint (JJ), video may be interrupted or not be output.

6 Precautions before connection

Follow the precautions below before connecting to external devices.


■ Installation

- Eliminate static electricity from your body before connecting cables.
- Do not place another UHDS on the UHDS.
- Do not block vent holes. Keep enough space (1.2in. (30 m) or more) around the product.
- Do not install the UHDS in a closed space.

If you have to install the product to an EIA rack mount in closed space, add a ventilation to keep the ambient temperature of 104°F (40°C) or less. If inadequately vented, the life of parts may be shortened and operations may be affected.

■ Cabling

- Read the manuals of external devices carefully
- Turn off the transmitter/receiver before connection.
- Insert the cable into the connector firmly and do not give the connector stress.
- Use the cable lacing bracket to secure a standard HDMI cable as shown.

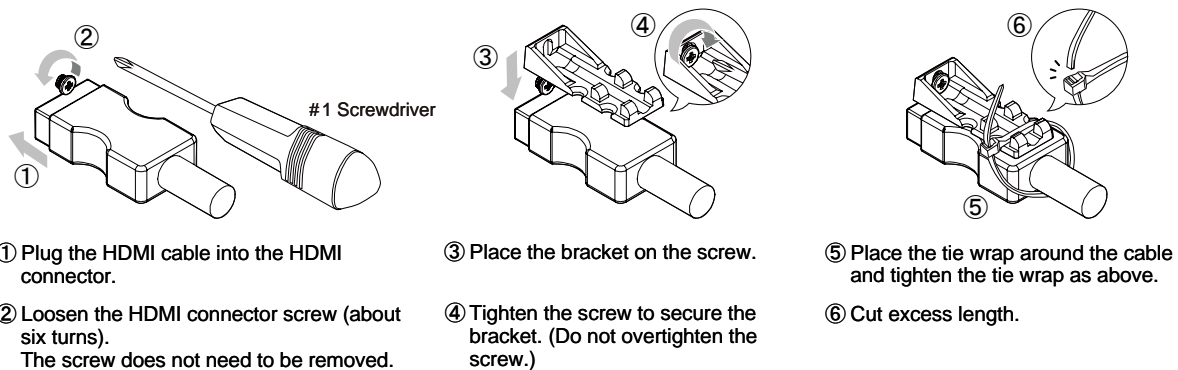

[Fig. 6.1] Cable Lacing Bracket (FB-01 For IDK products only)

7 Basic operation


7.1 Menu operations

You can set all input/output settings of video and audio signals from menu operation keys.

Menu operation keys

Select the menu number first and then select the setting number.

If you do not operate for 60 seconds in each step, the light of the segment display will be turned off.

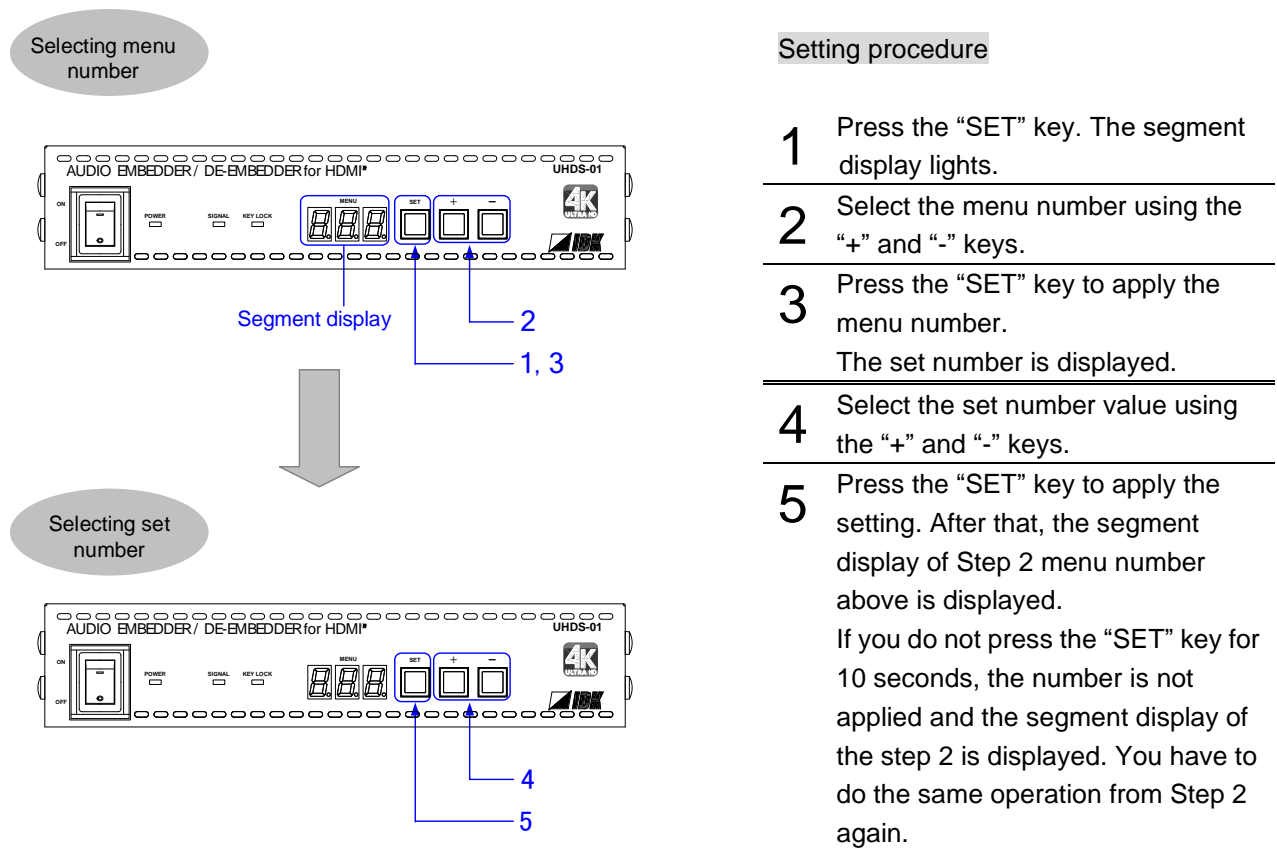


[Fig. 7.1] Menu key operation

7.2 Locking menu operation keys

Press and hold the “SET” key for 3 seconds or longer to set/cancel key lock.

If the UHDS is powered off with keys locked, the key are still locked at the time of reboot

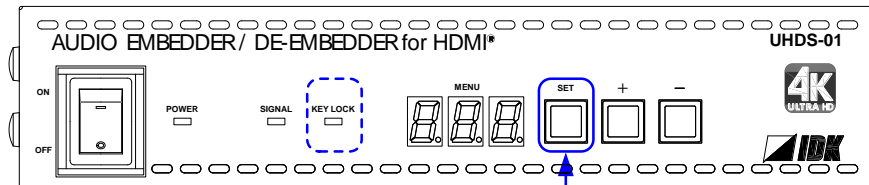

Menu operation keys will be locked by pressing the “SET” key for three seconds.




[Fig. 7.2] Locking menu operation keys

7.3 Initialization

All input and output settings will be initialized by powering on while pressing the “SET” key.

Note:

Once settings are initialized, they cannot be restored to the previous settings.

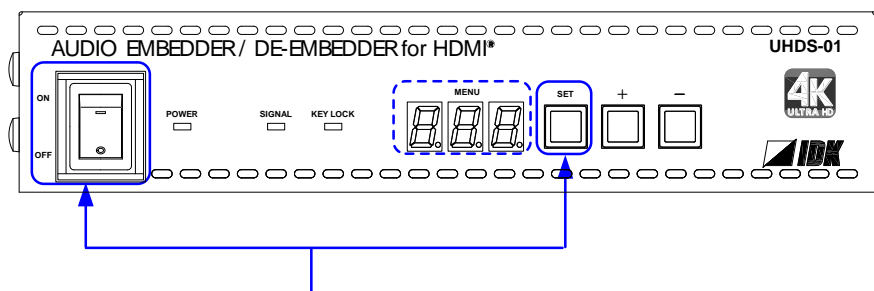

All input and output settings will be initialized by powering on while pressing the “SET” key.



[Fig. 7.3] Initialization

8 Menus

- Setup menus: setting video and audio signals in normal use
- Maintenance menus: checking operation
- Status display menus: displaying statuses of input signals and connection with sink devices

Note:

Normally, the maintenance menu and status display menu are not displayed as a default.

To display them, use the setting menu number [F99].

【8.2.20 [F99] Setting maintenance/status display menu】

8.1 Menu list

■ Setup menu

[Table 8.1] Setup menus

Menu number	Function	Setting	
		Set value	Default
F01 to F03	Copying EDID	OUT	OUT
F10	Setting EDID resolution (default)	SVGA to UHDTV	1080p
F12	Setting external EDID	OUT	OUT
F14	[F14] Setting copied EDID	Copy data 1 to 3	Copy data 1
F16	[F16] No-signal input monitoring	OFF/2 to 15 [sec.]	10 [sec.]
F20	Setting Deep Color	24/30/36 [bit]	24 [bit]
F22	Setting PCM Audio	32/44.1/48/88.2/96/192 [kHz]	48 [kHz]
F24	Setting AC-3 Dolby Digital Audio	OFF/ON	OFF
F26	Setting AAC Audio	OFF/ON	OFF
F28	Setting Dolby Digital Plus Audio	OFF/ON	OFF
F30	Setting DTS Audio	OFF/ON	OFF
F32	Setting DTS-HD Audio	OFF/ON	OFF
F34	Setting Dolby TrueHD Audio	OFF/ON	OFF
F36	Setting Audio channel	2 channels/3 (2.1) channels/ 6 (5.1) channels/ 8 (7.1) channels	2 channels

Menu number	Function	Setting	
		Set value	Default
F38	Copying CEC physical address copy of EDID	Copy/Not copy	Not copy
F42	Setting EDID WXGA	1366×768/1360×768	1360×768
[F44] Setting External audio input	[F44] Setting External audio input	Analog audio that is input from audio input connector Digital audio of HDMI input connector	Digital audio of HDMI input connector
F70	Setting audio output	ON/OFF	ON
F90	Displaying firmware version	—	—
F99	Setting maintenance/status display menu	No display/Display/Always display	No display

■ Maintenance menu

[Table 8.2] Maintenance menus

Menu number	Function	Setting	
		Set value	Default
C01	Setting HDCP input	Enable HDCP 2.2 encryption/ Enable HDCP 1.4 encryption/ Disable HDCP encryption	Enable HDCP 2.2 encryption
C10	Setting how long Hot plug is ignored	OFF/2 to15 [sec.]	OFF
C20	Setting forced HDMI output mod	oFF: DVI when reading EDID error. Er1: HDMI (without SCDC) when reading EDID error. AL1: Always HDMI (without SCDC). Er2: HDMI (with SCDC) when reading EDID error. AL2: Always HDMI (with SCDC).	DVI when reading EDID error.
C30	Setting output mode	Automatic/DVI/RGB/ YCbCr 4:2:0/YCbCr 4:2:2/ YCbCr 4:4:4	Automatic

■ Status display menu

[Table 8.3] Status display menus

Menu number	Function	Setting	
		Set value	Default
L01 to L22	[L01 to L22] Displaying input information	—	—
L30 to Lb0	Displaying output information	—	—

8.2 Setting input and output (Setting menu)

8.2.1 [F01 to F03] Copying EDID


Note:

“[]” shows each menu number in this chapter.

EDID of sink devices can be read and stored, and the copied EDID can apply in the same way of internal EDID.

Registering EDID:

1. Save the sink device EDID to a Copy Data (1 to 3): Menu number [F01 to F03]
2. Select the copy data you want to use: Menu number [F14]
3. Select the Copy EDID: Menu number [F10]

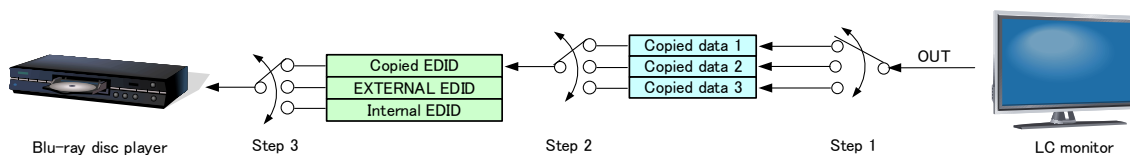

[Fig. 8.1] Copying EDID (UHDS-01)

Menu numbers

F01 to F03: Copied data 1 to 3


Setting values

01: OUT [Default] OUT1

Note:

If cascade connection is employed, the source device will read the EDID of the source-device-side UHDS. If two or more distributors are connected between a sink device and source device, follow the procedure below to read EDID data.

1. Copy the EDID of the sink device into the sink-device-side UHDS and set it as “Copied EDID” or “EXTERNAL (External EDID)”.
2. Copy the EDID of the sink-device-side UHDS into the source-device-side UHDS and set it as “Copied EDID” or “EXTERNAL (External EDID)”.

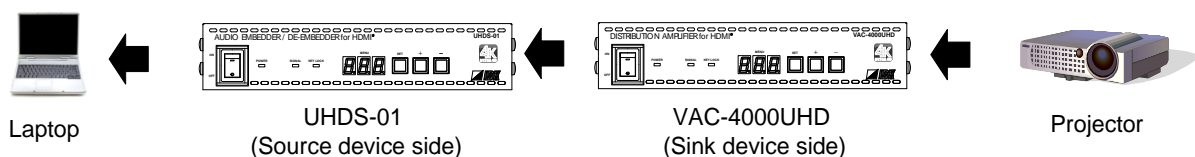

[Fig. 8.2] Reading EDID in cascade connection

8.2.2 [F10] Setting EDID resolution

You can set the EDID to be sent to the source device:

In order to use a built-in EDID (setting values “03” to “46”), set the maximum resolution supported by the sink device using setting values “03” to “46”.

Setting values

[Table 8.4] The maximum resolution of EDID

Setting values	Maximum resolution	Pixel	Standard	Remarks	
01	EXTERNAL (External EDID)	—	—	If no collected data, its default is 03.	
02	Copied EDID	—	—	If no collected data, its default is 03.	
03	1080p(59.94/60)	1920×1080	HDTV	Default	
04	720p	1280×720			
05	1080i	1920×1080			
06	1080p(24/25/30/50)	1920×1080			
07	SVGA	800×600		VESA	
08	XGA	1024×768			
09	VESA720	1280×720	For inputting DVI devices		
10	WXGA	1280×768			
11	WXGA	1280×800			
12	Quad-VGA	1280×960			
13	SXGA	1280×1024			
14	WXGA	1360×768, 1366×768	The number of pixels can be set in “8.2.16 [F42] Setting EDID WXGA”.		
15	SXGA+	1400×1050			
16	WXGA+	1440×900			
17	WXGA++	1600×900	(RB)		
18	UXGA	1600×1200			
19	WSXGA	1680×1050			
20	VESA1080	1920×1080	(RB), for inputting DVI devices		
21	WUXGA	1920×1200	(RB)		
22	QWXGA	2048×1152	(RB)		
23	WQHD	2560×1440	(RB)		
24	WQXGA	2560×1600	(RB)		
41	2160p (24/25/30)	3840×2160	UHDTV		
42	4096x2160 (24/25/30)	4096×2160	DCI		
43	2160p (50/59.94/60,4:2:0)	3840×2160	UHDTV	YCbCr 4:2:0 supported	
44	4096x2160 (50/59.94/60,4:2:0)	4096×2160	DCI	YCbCr 4:2:0 supported	
45	2160p (50/59.94/60,4:4:4)	3840×2160	UHDTV	YCbCr 4:2:0,YCbCr 4:2:2, YCbCr 4:4:4 supported	
46	4096x2160 (50/59.94/60,4:4:4)	4096×2160	DCI	YCbCr 4:2:0,YCbCr 4:2:2, YCbCr 4:4:4 supported	

(RB): Reduced Blanking

[8.2.3 [F12] Setting external EDID]

[8.2.4 [F14] Setting copied EDID]

[8.2.16 [F42] Setting EDID WXGA]

Notes:

- No.42, No.44, No.46 (4096x2160)
The source device may automatically select 3840x2160 (30p) depending on the internal EDID. If you want to use 4096x2160, select 4096x2160 in setting of the source device after setting the internal EDID.
- No.43, No.44 (YCbCr4:2:0 color depth)
The source device may automatically select 3840x2160 (30p) depending on the internal EDID. If you want to use YCbCr 4:2:0, select YCbCr 4:2:0 in setting of the source device after setting the internal EDID.

[Table 8.5] The maximum resolution and EDID supported pixels

Max. resolution (Setting values)	EDID supported pixels																								
	640x480	800x600	1024x768	1280x720	1280x768	1280x800	1280x960	1280x1024	1360x768*	1366x768*	1400x1050	1440x900	1600x900	1600x1200	1680x1050	1920x1080	1920x1200	2048x1152	2560x1440	2560x1600	3840x2160 (30p)	4096x2160 (30p)	3840x2160 (60p)	4096x2160 (60p)	
01	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
02	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
03	1080p (59.94/60)	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N
04	720p	Y	Y	N	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
05	1080i	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
06	1080p (24/25/30/50)	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N
07	800x600	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
08	1024x768	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
09	1280x720	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
10	1280x768	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
11	1280x800	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
12	1280x960	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
13	1280x1024	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
14	1360x768	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
15	1400x1050	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N	N
16	1440x900	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N	N
17	1600x900	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N	N
18	1600x1200	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N	N
19	1680x1050	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N	N	N
20	1920x1080	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N	N
21	1920x1200	Y	Y	Y	N	N	Y	Y	Y	N	N	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	N
22	2048x1152	Y	Y	Y	N	N	N	Y	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N
23	2560x1440	Y	Y	Y	N	N	N	N	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N
24	2560x1600	Y	Y	Y	N	N	N	N	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N
41	2160p (24/25/30)	Y	Y	Y	N	N	N	N	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N
42	4096x2160 (24/25/30)	Y	Y	Y	N	N	N	N	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	N
43	2160p (50/59.94/60, 4:2:0)	Y	Y	Y	N	N	N	N	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	P	N
44	4096x2160 (50/59.94/60, 4:2:0)	Y	Y	Y	N	N	N	N	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	P	P
45	2160p (50/59.94/60, 4:4:4)	Y	Y	Y	N	N	N	N	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	N
46	4096x2160 (50/59.94/60, 4:4:4)	Y	Y	Y	N	N	N	N	Y	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y

Y: Supported, P: Only YCbCr 4:2:0 supported, N: Not supported, —: Not used

* The number of pixels for 1360x768 and 1366x768 can be set in **"8.2.16 [F42] Setting EDID WXGA"**.
The default value is 1360x768.

[8.2.16 [F42] Setting EDID WXGA]


8.2.3 [F12] Setting external EDID

Note:

Set this menu before setting the EDID resolution to “01 EXTERNAL (External EDID)” in “8.2.2 [F10] Setting EDID resolution”.

You can set the HDMI output connector that will be read if EDID type is set to “EXTERNAL (External EDID)” in “8.2.2 [F10] Setting EDID resolution”.

1. Select the HDMI output connector: Menu numbers:[F12]
2. Select “EXTERNAL (External EDID)”: Menu numbers:[F10] (P.23)

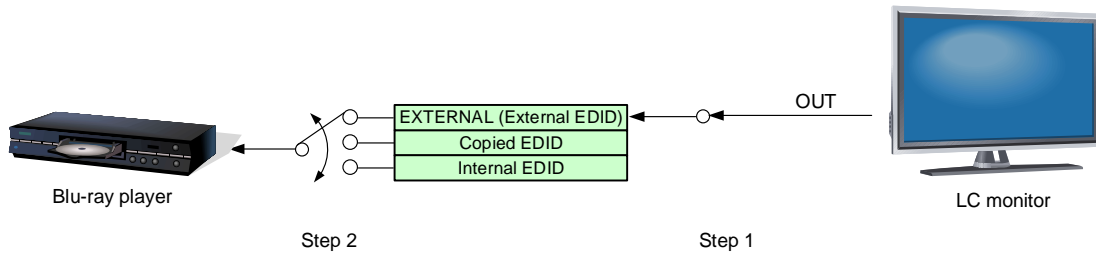

[Fig. 8.3] Registering external EDID

Setting values

01: OUT [Default] OUT1

Note:

Set the external EDID again

- After replacing a sink device while the UHDS is powered on or
- After changing a setting of a sink device while the UHDS is powered on.


8.2.4 [F14] Setting copied EDID

Note:

Set this menu before setting the EDID resolution to “02 Copied EDID” in “8.2.2 [F10] Setting EDID resolution”.

You can select the copied EDID data.

EDID copied (in 8.2.1 [F01 to F03] Copying EDID) from sink devices are saved in three areas.

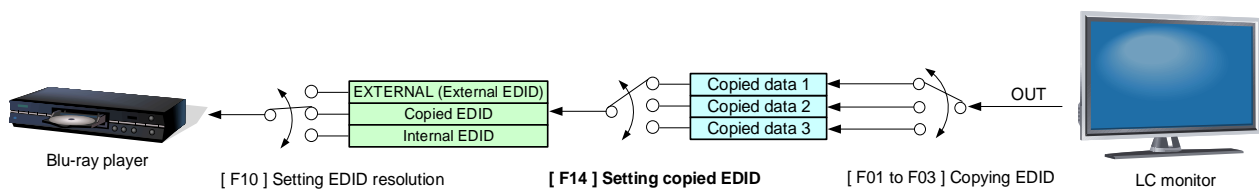


[Fig. 8.4] Setting copied EDID (UHDS-01)

Setting values

01 to 03: Copied data 1 to 3 [Default] Copied data 1

8.2.5 [F16] No-signal input monitoring

If you change EDID of the UHDS or turn on/off the UHDS, the source devices may not output video signals. In this menu, you can set the monitoring time.

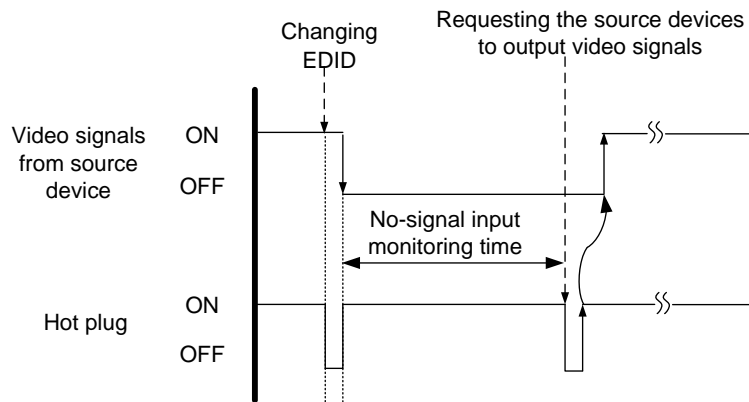

[Fig. 8.5] No-signal input monitoring time


Setting values

oFF :OFF

02 to 15 : 2 to 15 seconds [Default]: 10 seconds

Notes:

- If you use the power saving or Dual monitor function of the PC (Source device), set this menu to "OFF". The PC that receives output request may cancel those functions.
- If you set the time that is shorter than the output timing, the source device repeats reprocessing of output video signals. In this case, change the time to longer.

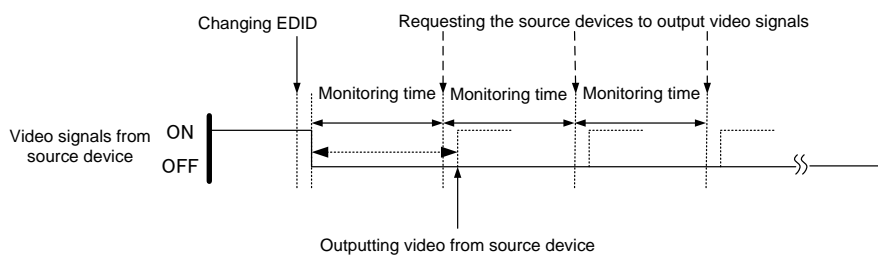

[Fig. 8.6] Repeating output signal setting

8.2.6 [F20] Setting Deep Color

You can set the Deep Color (color depth) that is output from the source device.

The setting will be applied only if one of 03 to 46 is selected for “8.2.2 [F10] Setting EDID resolution”.

Setting values

- 08 : 24 bit/pixel (8 bit/component) [Default]
- 10 : 30 bit/pixel (10 bit/component)
- 12 : 36 bit/pixel (12 bit/component)

Note:

If you select “30bit/pixel (10bit/component)” or “36bit/pixel (12bit/component)”, the transmission clock will be faster resulting in noise on video when a poor-quality cable or long cable is connected. In this case, change the setting to “24bit/pixel (8bit/component)”.

For the resolution of 4K@50/59.94/60 (YCbCr 4:4:4), the deep color will be 8 bit regardless of the setting of this menu.

8.2.7 [F22] Setting PCM Audio

You can set the maximum sampling frequency of PCM Audio that is output from the source device.

The setting will be applied only if one of 03 to 46 is selected for “8.2.2 [F10] Setting EDID resolution”.

Setting values

- 32 : 32 kHz
- 44 : 44.1 kHz
- 48 : 48 kHz
- 88 : 88.2 kHz
- 96 : 96 kHz
- 192 : 192 kHz

Note:

Some LCD monitors do not support several audio formats. Select the audio format and sampling frequency supported by your devices.

8.2.8 [F24] Setting AC-3 Dolby Digital Audio

You can set the maximum sampling frequency of AC-3 Dolby Digital Audio that is output from the source device.

The setting will be applied only if one of 03 to 46 is selected for “8.2.2 [F10] Setting EDID resolution”.

Setting values

- on : ON (The maximum sampling frequency: 48 kHz)
- off : OFF [Default]

Note:

Some LCD monitors do not support several audio formats. Select the audio format supported by your devices.

8.2.9 [F26] Setting AAC Audio

You can set the AAC Audio that is output from the source device.

The setting will be applied only if one of 03 to 46 is selected for “8.2.2 [F10] Setting EDID resolution”.

Setting values

on : ON (The maximum sampling frequency: 96 kHz)

oFF : OFF [Default]

Note:

Some LCD monitors do not support several audio formats. Select the audio format supported by your devices.

8.2.10 [F28] Setting Dolby Digital Plus Audio

You can set the Dolby Digital Plus Audio that is output from the source device.

The setting will be applied only if one of 03 to 28 is selected for “8.2.2 [F10] Setting EDID resolution”.

Setting values

on : ON (The maximum sampling frequency: 48 kHz)

oFF : OFF [Default]

Note:

Some LCD monitors do not support several audio formats. Select the audio format supported by your devices.

8.2.11 [F30] Setting DTS Audio

You can set the DTS Audio that is output from the source device.

The setting will be applied only if one of 03 to 46 is selected for “8.2.2 [F10] Setting EDID resolution”.

Setting values

on : ON (The maximum sampling frequency: 96 kHz)

oFF : OFF [Default]

Note:

Some LCD monitors do not support several audio formats. Select the audio format supported by your devices.

8.2.12 [F32] Setting DTS-HD Audio

You can set the DTS-HD Audio that is output from the source device.

The setting will be applied only if one of 03 to 46 is selected for “8.2.2 [F10] Setting EDID resolution”.

Setting values

on : ON (The maximum sampling frequency: 192 kHz)

oFF : OFF [Default]

Note:

Some LCD monitors do not support several audio formats. Select the audio format supported by your devices.

8.2.13 [F34] Setting Dolby TrueHD Audio

You can set the Dolby TrueHD Audio that is output from the source device.

The setting will be applied only if one of 03 to 46 is selected for “8.2.2 [F10] Setting EDID resolution”.

Setting values

on : ON (The maximum sampling frequency: 192 kHz)

oFF : OFF [Default]

Note:

Some LCD monitors do not support several audio formats. Select the audio format supported by your devices.


8.2.14 [F36] Setting Audio channel

You can set the number of channels for the multiple-channel audio that is output from the source device. The setting will be applied only if one of 03 to 46 is selected for “8.2.2 [F10] Setting EDID resolution”.

Setting values

- 02 : 2 channels [Default]
- 03 : 3 channels (2.1 channels)
- 06 : 6 channels (5.1 channels)
- 08 : 8 channels (7.1 channels)

- The number of channels and speaker configuration

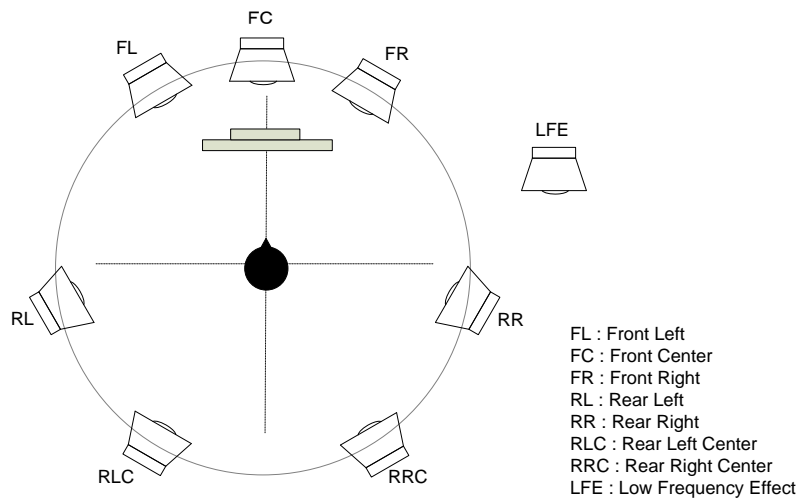

Speakers	FL/FR	LFE	FC	RL/RR	RLC/RRC
2 (2 channels)	ON	OFF	OFF	OFF	OFF
3 (2.1 channels)	ON	ON	OFF	OFF	OFF
6 (5.1 channels)	ON	ON	ON	ON	OFF
8 (7.1 channels)	ON	ON	ON	ON	ON

[Table 8.7] The number of channels and speaker configuration

8.2.15 [F38] Copying CEC physical address copy of EDID

CEC: Pass through between IN and OUT1

The CEC physical address of the sink device that is connected to OUT1 can be copied into the EDID of the UHDS.

If the CEC physical address of the connected sink device and the UHDS' address are not the same, the CEC functions, such as input switching in the sink device at start-up, may not work correctly. The problem can be solved by using the CEC physical address that is copied into the UHDS.

The setting will be applied only if CEC-supported source and sink devices are connected and one of 03 to 28 is selected for "8.2.2 [F10] Setting EDID resolution".

Setting values

- on : Copy physical address
- oFF : Not copy physical address [Default]

Note:

CEC system link functions supported by other companies are not guaranteed to work correctly by this setting. Check the actual configuration.

8.2.16 [F42] Setting EDID WXGA

You can set the number of WXGA pixels based on the resolution setting of EDID.

The setting will be applied only if one of 03 to 46 is selected for "8.2.2 [F10] Setting EDID resolution".

Setting values

- on : 1366x768
- oFF : 1360x768 [Default]

8.2.17 [F44] Setting External audio input

You can set the audio that is output from the HDMI output connector.

Audio can be selected from analog audio that is input from audio input connector or digital audio of HDMI input connector.

Setting values

- on : Analog audio that is input from audio input connector
- oFF : Digital audio of HDMI input connector [Default]

8.2.18 [F70] Setting audio output

You can set audio ON/OFF that is output from the HDMI output connectors.

Menu numbers

F70: OUT

Setting values

on : ON [Default]

oFF : OFF

8.2.19 [F90] Displaying firmware version

You can display the firmware version.

8.2.20 [F99] Setting maintenance/status display menu

You can set the display setting of the maintenance menu and status display menu.

[8.1 Menu list]

Setting values

oFF : Only setting values are displayed. [Default]

on : At the next start-up, settings of "oFF" will be applied.

ALL : Always displays

[Table 8.6] Displaying menu

Setting	Menu		
	Setting value	Maintenance	Status
oFF	Displayed	Not displayed	Not displayed
on	*	*	*
ALL	Displayed	Displayed	Displayed

* At the time of the next start-up, settings of "oFF" will be applied.

8.3 Checking operation (Maintenance menu)

You can set necessary items for operation verification.


This menu is enabled and displayed by setting [F99] to “on” or “ALL”.

To finish the operation, set the “SET” key.

8.3.1 [C01] Setting HDCP input

Some source devices check whether the connected device supports HDCP and then those source devices decide whether they encrypt HDCP signals or not.

Since the UHDS is HDCP compliant, if it is connected to a display device that does not support HDCP, video may not be displayed. In these cases, the problem can be solved by setting this menu to “oFF”.

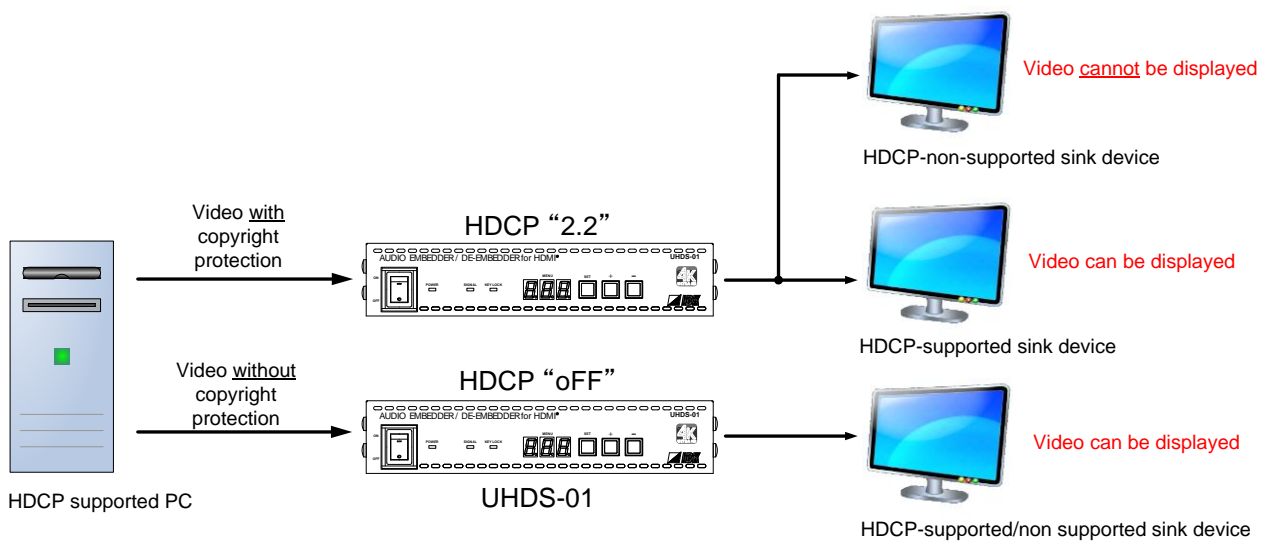

[Fig. 8.8] HDCP-supported and HDCP-non-supported display devices

Setting values



- 2.2 : Enable HDCP 2.2 encryption [Default]
- 1.4 : Enable HDCP 1.4 encryption
- oFF : Disable HDCP encryption

Notes:

- In order to display video whose copyright is protected, set this menu to “2.2” or “1.4”.
- HDCP2.2 (stream type 0) contents can be displayed on sink devices supporting HDCP 2.2/HDCP 1.4.
- HDCP2.2 (stream type 1) contents can be displayed on sink devices supporting HDCP2.2 but cannot be displayed on sink devices supporting HDCP1.4.

8.3.2 [C10] Setting how long Hot plug is ignored

You can set the masking time to ignore video output requests that are sent from the sink device. If those signals are repeatedly sent from the sink device within a short cycle, the UHDS tries to set the video output every time. As a result, video may not be output. In this case, video can be output correctly by setting this menu.

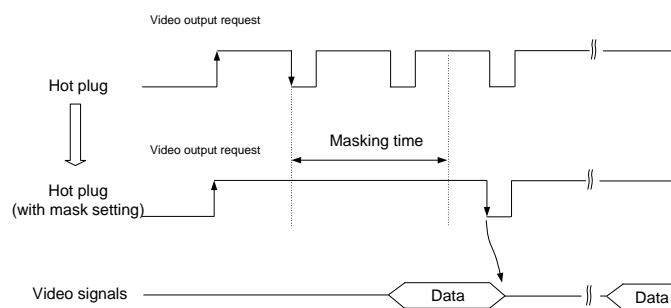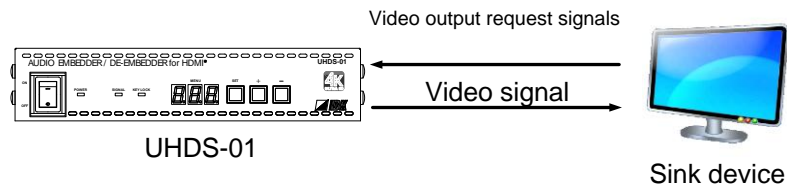

[Fig. 8.9] Hot plug ignorance time

Menu numbers

C10: OUT

Setting values

oFF : No masking [Default]
02 to 15 : 2 to 15 [second]

8.3.3 [C20] Setting forced HDMI output mode

You can set how to check sink device EDID.

the UHDS finds whether the sink device supports HDMI or DVI according to EDID acquired from the sink device and output appropriate video signals. However, if EDID cannot be acquired for some reason, the sink device type cannot be determined. In such a case, audio may not be output. To prevent or solve the problem, you can output the desired signals by setting this menu.

Menu numbers

C20: OUT

Setting values

oFF : Determines the sink device is DVI when EDID cannot be read [Default]

Er1 : Determines the sink device is HDMI (without SCDC) when EDID cannot be read

AL1 : Always determines the sink device is HDMI (without SCDC)

Er2 : Determines the sink device is HDMI (with SCDC) when EDID cannot be read

AL2 : Always determines the sink device is HDMI (with SCDC)

Notes:

- If you want to use this menu other than default setting, set “**8.2.2 [F10] Setting EDID resolution**” to a value other than “01” (EXTERNAL) and set the resolution supported by the sink device.
- This menu is enabled when HDMI signals are input and the output mode is set to the value other than “DVI”.

[8.3.4 [C30] Setting output mode]

8.3.4 [C30] Setting output mode

You can set the color space that will be sent to the sink device

The sink device automatically selects the appropriate color space according to the color space of the input video. If the sink device cannot do it for some reason, you can select the color space manually.

Menu numbers

C30: OUT

Setting values

rgb : RGB output

422 : YCbCr 4:2:2 output

444 : YCbCr 4:4:4 output

d : DVI output

420 : YCbCr 4:2:0 output (Enabled only video is output at 4K@50/59.94/60. For other resolution, this menu is set to "oFF")

oFF : Automatic [Default]

Notes:

- This setting is applied only HDMI signals are input.
- For 4K YCbCr 4:2:0, only CEA-861 resolutions are supported.
- If 4K format YCbCr 4:4:4 signals are input, the UHDS automatically outputs signals at YCbCr 4:2:0 to YCbCr 4:2:0-supported (YCbCr 4:4:4 not supported) sink device.

8.4 Displaying input/output statuses (Status display menu)

Input and output statuses of the UHDS can be displayed.

The status display menus can be operated by setting “8.2.20 [F99] Setting maintenance/status display menu” to “on” (Display) or “ALL” (Always display).

Press the “SET” key to exit the operation.

8.4.1 [L01 to L22] Displaying input information

[Table 8.7] Input information

Menu number	Displayed value	Description
● HDMI/DVI mode and color depth of input video		
L01	H08	HDMI 24 bit/pixel (8bit/component)
	H10	HDMI 30 bit/pixel (10bit/component)
	H12	HDMI 36 bit/pixel (12bit/component)
	d08	DVI 24 bit/pixel (8bit/component)
	- - -	No input
● HDCP of input video		
L02	on	with HDCP
	oFF	without HDCP
	- - -	No input
● HDCP authorization of input video (from the source device side)		
L03	1.4	with authorization (HDCP 1.4)
	2.2	with authorization (HDCP 2.2)
	oFF	without authorization
	- - -	No input
● Color space of input video		
L04	rgb	RGB
	422	YCbCr 4:2:2
	420	YCbCr 4:2:0
	444	YCbCr 4:4:4
	- - -	Unknown or no input
● Input video frequency		
L05	59.9	Input vertical synchronization frequency (with 59.94 Hz)
	- - -	No input
● DDC power supply		
L06	on	DDC powered on
	oFF	DDC powered off
● Input resolution		
L07	1920_1080P 60	Scrolling display of input resolution (1920×1080p 60 Hz)
	- - -	No input

Menu number	Displayed value	Description
The segment display is three digits. The first (left) two digits show the audio format, and third digit (X) shows the number of audio channels (1 = 2 channels, 2 = 2.1 channels, 5 = 5.1 channels, 7 = 7.1 channels).		
L10	---	Unknown or no input
	00n	Unknown
	01n	PCM Audio
	02n	AC-3 Audio
	03n	MPEG-1 Audio
	04n	MP3 Audio
	05n	MPEG-2 Audio
	06n	AACLC Audio
	07n	DTS Audio
	08n	ATRAC Audio
	09n	DSD Audio
	10n	Dolby Digital Plus Audio
	11n	DTS-HD Audio
	12n	Dolby TrueHD Audio
	13n	DST Audio
14n	WMA Audio	
15n	HE-AAC/HE-AACv2/MPEG Surround Audio	
● Audio input sampling frequency		
L11	22	22.05 kHz
	24	24 kHz
	32	32 kHz
	44	44.1 kHz
	48	48 kHz
	88	88.2 kHz
	96	96 kHz
	176	176.4 kHz
	192	192 kHz
	768	768 kHz
	_01	Unknown
	_05	
	_07	
	_11	
_13		
_15		
---	No input	

Menu number	Displayed value	Description
● Audio input bits, HBR (High Bit-Rate Audio)		
L12	H16	16 bit, HBR
	P16	16 bit, PCM
	_16	16 bit, Compressed audio other than HBR
	H20	20 bit, HBR
	P20	20 bit, PCM
	_20	20 bit, Compressed audio except for HBR
	H24	24 bit, HBR
	P24	24 bit, PCM
	_24	24 bit, Compressed audio other than HBR
	- - -	No input
● Audio input status (Digital audio)		
L13	000	No audio input
	001	Being input detecting
	002	Normal input
	- - -	No input
● Scrambling status of input signal		
L20	on	With scrambling (4K format except for YCbCr 4:2:0)
	oFF	No scrambling
	- - -	No input
● TMDS clock ratio of input signal		
L21	1_1	1/1
	1_4	1/4 (4K format except for YCbCr 4:2:0)
	- - -	No input
● Stream type of input signal (with HDCP 2.2)		
L22	000	Type 0
	001	Type 1
	non	HDCP1.4, or no HDCP signal
	- - -	No input

8.4.2 [L30 to Lb0] Displaying output information

[Table 8.8] Output information


Menu number	Displayed value	Description
● Deep Color: sink device status		
L30	08	24 bit/pixel (8 bit/component) supported
	10	30 bit/pixel (10 bit/component) supported
	12	36 bit/pixel (12 bit/component) supported
	- - -	Not connected
● Color space: sink device status		
L40	rgb	RGB supported
	422	YCbCr 4:2:2 supported
	444	YCbCr 4:4:4 supported (4K@50/59.94/60 (YCbCr 4:2:0) included)
	444_420	Scrolling display Up to YCbCr 4:2:0 when resolution of sink device is 4K@50/59.94/60
- - -	Not connected	
● Color space: output status		
L50	rgb	RGB output
	422	YCbCr 4:2:2 output
	420	YCbCr 4:2:0 output
	444	YCbCr 4:4:4 output
- - -	Not connected	
● Hot plug detection status		
L60	on	With Hot plug detection
	oFF	Without Hot plug detection
● HDMI/DVI sink device status		
L70	HC	HDMI (Compressed audio supported)
	HP	HDMI (PCM audio supported)
	d	DVI (Audio not supported)
	- - -	Not connected
● HDCP authorization		
L80	000	None
	001	Being authorized
	002	
	003	
	004	Authorization ended normally
	005	Authorization ended abnormally
● HDCP status		
L90	1.4	HDCP supported (HDCP 1.4)
	2.2	HDCP supported (HDCP 2.2)
	oFF	HDCP not supported or no HDCP signals
	- - -	Not connected

Menu number	Displayed value	Description
● SCDC sink device		
LA0	on	SCDC supported
	oFF	SCDC not supported
	- - -	Not connected
● Scrambling output status		
Lb0	on	With scrambling
	oFF	Without scrambling
	- - -	Not connected
● HDR sink device status		
Lc0	on	HDR supported
	oFF	HDR not supported
	- - -	Not connected
● 3D sink device status		
Ld0	on	3D supported
	oFF	3D not supported
	- - -	Not connected

9 Specifications

9.1 Pin assignments

9.1.1 HDMI Type A connector



Pin #	Signal	Pin #	Signal
1	TMDS data2+	10	TMDS clock+
2	TMDS data2shield	11	TMDS clock shield
3	TMDS data2-	12	TMDS clock
4	TMDS data1+	13	CEC
5	TMDS data1shield	14	Backup (N.C.)
6	TMDS data1-	15	SCL
7	TMDS data0+	16	SDA
8	TMDS data0shield	17	DDC/CEC ground
9	TMDS data0-	18	+5 power supply
		19	Hot plug Detect

*N.C.:No Connection

[Fig. 9.1] HDMI Type A pin assignments

9.2 Product specification

Item			Description	
Input	Video	HDMI / DVI	Number / Signal	1 input / HDMI, DVI 1.0 (HDCP 1.4 / 2.2) (*1) / HDR (*2) / 3D (*3) / x.v.Color - TMDs single link - TMDs clocks: 25 MHz to 300 MHz - Dot clocks: 25 MHz to 600 MHz - TMDs data rate: 0.75 Gbps to 18 Gbps
			Connector	1 female HDMI Type A (19-pin)
		Others	Color depth : 24 bit, 30 bit, 36 bit Deep Color (*5)	
		Formats	VGA to 4K (*4) 480i / 480p / 576i / 576p / 720p / 1080i / 1080p / 4K (*4)	
	Audio	Digital	Number / Signal	1 input / Multi-channel LPCM up to 8 channels - Sampling frequency: 32kHz to 192kHz - Sample Size: 16bit to 24bit - Reference level: -20 dBFS - Max. input level: 0 dBFS
			Connector	1 female HDMI Type A (19-pin)
		Analog	Number / Signal	1 output / Stereo L/R unbalanced signals (*6) - Input impedance: 24 Ω, - Reference level: -10 dBu - Max. output level: +10 dBu
			Connector	1 RCA jack
Output	Video	HDMI / DVI	Number / Signal	1 output / HDMI, DVI 1.0 (HDCP 1.4 / 2.2) (*1) / HDR (*2) / 3D (*3) / x.v.Color - TMDs single link - TMDs clocks: 25 MHz to 300 MHz - Dot clocks: 25 MHz to 600 MHz - TMDs data rate: 0.75 Gbps to 18 Gbps
			Connector	1 female HDMI Type A (19-pin)
		Others	Color depth : 24 bit, 30 bit, 36 bit Deep Color (*5)	
		Formats	VGA to 4K (*4) 480i / 480p / 576i / 576p / 720p / 1080i / 1080p / 4K (*4)	
	Audio	Digital	Number / Signal	1 output / Multi-channel linear PCM up to 8 channels - Sampling frequency: 32kHz to 192kHz - Sample Size: 16bit to 24bit - Reference level: -20 dBFS - Max. output level: 0 dBFS
			Connector	1 female HDMI Type A (19-pin)
		Analog	Number / Signal	1 output / Stereo L/R unbalanced signals (*7) - Output impedance: 75 Ω, - Reference level: -10 dBu - Max. output level: +10 dBu
			Connector	1 RCA jack
Plug & Play			DCC2B (built-in EDID / EDID copied from monitors / can be selected from EDID of connected monitors) Built-in EDID: the maximum resolution can be selected.	
Max. Cable distance		Input	1080p@60: 131 ft. (40 m), 4K@60: 39 ft. (12 m) (*8)	
		Output	1080p@60: 131 ft. (40 m), 4K@60: 39 ft. (12 m) (*8)	
Functions	Contents	Audio A/D and D/A conversion, Anti-snow (*9), De-embedded audio from HDMI signal DDC buffer, 7 segment LED signal status check, Connection Reset (*10), Key lock		
Others	Power	100 - 240 VAC ± 10 %, 50 Hz/60 Hz ± 3 Hz		
	Power consumption	About 8 Watts		
	Dimensions	8.3 × 1.7 × 7.9" (210 (W) × 44 (H) × 200 (D) mm) (EIA 1U high, half rack wide) (Excluding connectors and the like)		
	Weight	3.3 lbs. (1.5kg)		
	Temperature	Operating: 32°F to 104°F / 0°C to +40°C Storage: -4°F to 176°F / -20°C to +80°C		
	Humidity	Operating / Storage humidity: 20 % to 90 % (Non Condensing)		

*1 ARC and HEC are not supported. CEC: Pass through between IN and OUT1

*2 HDR will be supported when you connect HDR supported corresponding sink device and select external EDID setting, or when you copy EDID of HDR supported sink device by selecting EDID copy setting. If the unit supports HDR, all output signals from the unit are HDR supported signals.

*3 3D will be supported when you connect 3D supported corresponding sink device and select external EDID setting, or when you copy EDID of 3D supported sink device by selecting EDID copy setting. If the unit supports 3D, all output signals from the unit are 3D supported signals.

*4 4K format: 24 Hz / 25 Hz / 30 Hz / 50 Hz (4:4:4) / 59.94 Hz (4:4:4) / 60 Hz (4:4:4) are supported.

*5 4K format: following color depth are supported.

· 24 Hz / 25 Hz / 30 Hz: 24 bit, 30 bit, 36 bit (RGB, YCbCr 4:4:4, YCbCr 4:2:2)
· 50 Hz / 59.94 Hz / 60 Hz : 24 bit, 30 bit, 36 bit (YCbCr 4:2:2, YCbCr 4:2:0)
: 24 bit (RGB, YCbCr 4:4:4)

*6 Audio input is switch selectable between digital embedded audio and analog audio.

*7 Analog audio output supports only 2 channel linear PCM.

*8 The maximum cable distance varies depending on the connected devices and was measured under following conditions:

· 1080p@60: when IDK's AWG24 cable was used and signals of 1080p@60 24 bit / pixel (8 bit / component) was input or output.
· 4K@60 : when IDK's 18 Gbps supported cable was used and signals of 4K@60 24 bit / pixel (8 bit / component) was input or output.

The maximum cable distance depends on the connected devices. The distance may not be extended with some device combinations, cabling method, or other manufacturer's cable. Video may be disturbed or may not be output even if signals are within the range mentioned above.

*9 The anti-snow feature automatically fixes snow noise that is a specific symptom of HDCP-compliant signals and mainly occurs at start-up. This feature does not work when snow noise has already occurred during startup or when it occurs due to a bad condition of the transmission line.

*10 For digital systems, some problems, such as an HDCP authentication error, can often be recovered by physically disconnecting and reconnecting the digital cables. However, the Connection Reset feature will fix these problems automatically without the need to physically plug and unplug the cables. It creates the same condition as if the cable were physically disconnected and reconnected. This feature only works for the MSD's output. If other devices are connected between the MSD's output and sink device, this feature may be invalid.

10 Troubleshooting

In case this device does not work correctly, please check the following items first.

- Are this device and the connected devices turned on normally?
- Are cables connected correctly?
- Are there no loose connections?
- Are cables that are appropriate to this device being used?
- For 4K format, is an 18 Gbps ultra-high-speed cable used?
- Are signal specifications of connected devices matched to each other?
- Are settings of the sink device correct?
- Are there any close objects that may cause noise?

If the problem still cannot be solved, check the items in the table below. Please refer to manuals of connected devices as well, since they may possibly cause the problem.

Problem	Check item	Page
● Video output		
Video is not output	[1] Verify that the EDID resolution setting of the UHDS is set to the input resolution supported by the display device. <ul style="list-style-type: none"> • The EDID resolution is set to 1080p by default, but some TVs do not support that resolution. • If the EDID resolution is set to 1080i, the video may not be output to the display device that does not support the interlaced signals. • Some monitors for PCs do not support the resolutions for TVs. Some LCD TVs do not support PC resolutions (VGA to QWXGA). 	23 [F10]
	[2] Does "SIGNAL LED" of the front panel light? If the "SIGNAL" LED lights, check [3] to [8]; if the LED turns off, check [9] and [11].	14
	[3] Does the input signals authenticate HDCP? Check the input HDCP authentication. <ul style="list-style-type: none"> 1.4: Signals protected by HDCP 1.4. 2.2: Signals protected by HDCP 2.2. oFF: Signals whose copyright is not protected. 	38 [L03]
	[4] Does the sink device support HDCP? Check the HDCP supporting status. If the check result is different from that of [3], video is not displayed. Please note the HDCP supporting status depends on each connector of the sink device. "oFF" or "- - -": The resolution of the sink device may not be supported; check the specification of the sink device. If the video does not required HDCP, you can also disable HDCP output to the source device by setting the UHDS.	41 [L90]
		34 [C01]

Problem	Check item	Page
	[5] Is an unsupported resolution is input to the sink device? Check the resolution and video frequency. Some resolutions of sink device are not supported; check the specification of the sink device.	38 [L07]
	[6] Does the sink device support SCDC? ①Check the TMDS clock ratio of input signals. • 1_4: SCDC signals • 1_1: Not SCDC signals → This problem occurs due to another problem ②Check the SCDC supported status of the sink device. • on: SCDC is supported. • oFF: SCDC is not supported → video is not displayed.	40 [L21] 42 [LA0]
	[7] ①Check the stream type of input signals. • 000: Video is authorized to be displayed to all devices supporting HDCP 1.4,HDCP 2.2. • 001: Video is authorized to be displayed only to devices supporting HDCP 2.2. ②Check the HDCP supported status.	40 [L22] 41 [L90]
	[8] Change the setting of Hot plug ignoring time.	35 [C1n]
	[9] If a long cable is connected for input or output, replace it with a 5 meter/16.4 feet or shorter cable. A 5 meter/16.4 feet or longer cable can be connected for digital input/output for the UHDS, but some cables fail HDCP authorization or EDID acquisition depending on the quality of the cable and connected devices. For 4K format, see “ 5 Typical application ”.	16
	[10] Verify that No-signal input monitoring time ([F16]) is not too short.	27 [F16]
	[11] Check the video output setting of the source device.	—
Interference or noise appears on video.	If a long cable is connected for input or output, replace it with a 5 m/16.4 feet or shorter cable. Even though a 5 m/16.4 feet cable can be connected since the UHDS has compensation circuit for digital input and output, it cannot deliver its full performance depending on the cable quality and connected devices. If the problem is solved by the replacement with a shorter cable, the signals may have been deteriorated because of the long-distance transmission. IDK provides high-quality cables, boosters, and cable extenders. Please contact us as needed. For 4K format, see “ 5 Typical application ”.	16
	The transmission clock of Deep Color signals are faster than normal signals. If a poor-quality or long cable is connected when signals are input or output, noise may appear on the video. Deep Color can be controlled by the EDID setting.	28 [F20]

Problem	Check item	Page
Video blinks.	If interlace signals are input to a sink device that does not support interlace signals, the video blinks. Check the supported resolution of the sink device.	23 [F10]
Video edges (up/down/right/left) are cut out.	Some sink devices display input video in overscan, and the video may be cut out. Check the display setting of the sink device.	—
Video is distorted horizontally or vertically.	Some sink devices display input video on full screen, and the aspect ratio cannot be kept. Check the display setting of the sink device. With some resolutions, full-screen display cannot be avoided. In that case, change the output resolution of the source device.	—
Black bars appear on PC images. Only part of the PC image is displayed, and the rest of the image is displayed by moving the mouse.	If the PC has the Panel Fit function, select "Scale Full Screen". If the resolution that is set for the PC and the resolution that is actually output from the PC are not matched, those problems may occur. Check the resolution of the PC and the EDID resolution setting.	23 [F10]
The dual monitor function cannot be set or it is canceled automatically.	When the No-signal input monitoring function works, the dual monitor function may not be enabled correctly. In this case, turn off this monitoring function.	27 [F16]
● Audio output		
Analog input audio cannot be embedded to HDMI signals.	If external audio input is set to "oFF", the problem occurs. Set it to "on" to select analog input audio.	32 [F44]
Video is displayed, but audio is not output.	Verify that audio output is turned on.	33 [F7n]
	If there are multiple output connectors in the source device, check the audio output setting of the source device.	—
	Verify that audio whose format is supported by the connected sink device is input. Especially, LCD monitors may not output 88.2 kHz or higher linear PCM and compressed audio (such as Dolby Digital and DTS). In order to play a Blu-ray disc having compressed audio, check the audio output setting of the source device. You can also control audio signals that will be output from the source device by setting EDID.	28 [F22] to 30 [F34]
	Verify that DVI signals are not being output from the source device.	—

Problem	Check item	Page
Even though multi-channel audio is played, only audio signals of 2 channels are output.	For multiple channel play, change the EDID setting which is set to 2 channels by default.	31 [F36]
Audio is output from HDMI output, but it is not output from analog audio output.	If compressed audio (such as Dolby Digital and DTS) is input, analog audio is not output. Only 2-channel linear PCM is supported for analog audio output.	28 [F22] to 30 [F34]
Audio is output from analog audio output, but it is not output from HDMI output.	Verify that audio output is set to ON.	33 [F7n]
	Verify that audio can be output by the connected sink device with the selected resolution. If an output resolution for PCs (VGA to QWXGA) is selected, the sink device may not output audio.	23 [F10]
	Verify that the selected sampling frequency is supported by the connected sink device. Some LCD monitors cannot output high-sampling frequency audio (88.2kHz or higher). Audio signals output from the source device can be controlled by setting EDID.	28 [F22] to 30 [F34]
Compressed audio (such as Dolby Digital and DTS) is not output from the source device.	Inputting compressed audio is limited by the EDID setting(factory default). In order to use compressed audio, change the EDID setting.	28 [F22] to 30 [F34]
	Check the audio output setting of the source device.	—
● Others		
Devices cannot be controlled by CEC.	If you use CEC, enable the HDMI link control function of devices to be connected to the UHDS, such as LCD TVs and Blu-ray disk recorders.	—
	Connect the desired sink device to OUT1. If connecting to another connector, the device cannot be controlled.	—

If additional assistance is required, please perform the following tests and then contact us.

No.	Checking items	Result
1	The problem occurs at all connectors?	Yes or No
2	Connect the devices using genuine cables without connecting the UHDS-01. The problem still cannot be solved? Please contact us for assistance.	Yes or No

User Guide of UHDS-01

Ver.1.5.0

Issued on: 8 August 2023



Headquarters

IDK Corporation
7-9-1 Chuo, Yamato-shi, Kanagawa-pref.
242-0021 JAPAN
TEL: +81-46-200-0764 FAX: +81-46-200-0765

Email: idk_eng@idk.co.jp

URL: www.idkav.com

USA

IDK America Inc.
72 Grays Bridge Road Suite 1-C, Brookfield, CT 06804
TEL: +1-203-204-2445

Email: sales@idkav.com

URL: www.idkav.com

Europe

IDK Europe GmbH
Lise-Meitner-Str. 6, D-40878 Ratingen
TEL: +49-2102-578-301-0

Email: info@idkav.eu

URL: www.idkav.com



Product information Support

Arvanics Corporation
7-9-1 Chuo, Yamato-shi, Kanagawa-pref.
242-0021 JAPAN
TEL: +81-46-259-6920 FAX: +81-46-259-6930

Email: info@arvanics.com

URL: www.arvanics.com

Information in this document is subject to change without notice.

©2016 IDK Corporation, all rights reserved. All trademarks mentioned are the property of their respective owners.