



The PD-S15 is a power distribution unit with 5 V and 12 VDC power.


By using a dedicated DC power cable (sold separately), the PD-S15 supplies power to up to 15 IDK products which operate via an AC adapter.

■ Specification


Item		Description
DC power output		15 outputs 5 VDC, 3 A or 12 VDC, 5 A (Maximum distribution power: 260 W)
Function		Overcurrent protection
General	Dimensions (Unit)	4.2 (W) × 2.4 (H) × 5.9 (D)" (106 (W) × 61 (H) × 150 (D) mm) (Excluding connectors and the like)
	Weight (Unit)	1.8 lbs. (0.8 kg)
	AC adapter	Input : 100 - 240 VAC ±10%, 50 Hz/60 Hz ±3 Hz Output : DC 12 V 24 A 288.0 W (A dedicated AC adapter is provided)
	Dimensions (AC adapter)	4.6 (W) × 1.9 (H) × 10 (D)" (116 (W) × 47 (H) × 254 (D) mm) (Excluding connectors and the like)
	Weight (AC adapter)	3.5 lbs. (1.6 kg)
	Power consumption	About 6.5 W
	Temperature	Operating : 32°F to 104°F (0°C to +40°C) Storage : -4°F to +176°F (-20°C to +80°C)
	Humidity	Operating/Storage: 20% to 90% (Non Condensing)

■ Front & Rear Panels

PD-S15

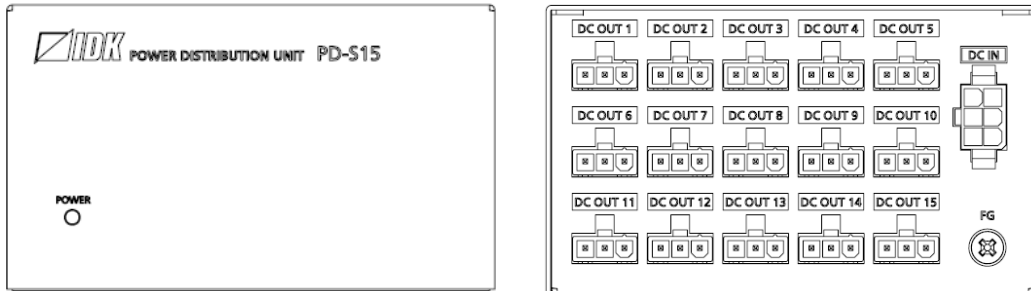

Dedicated AC adapter

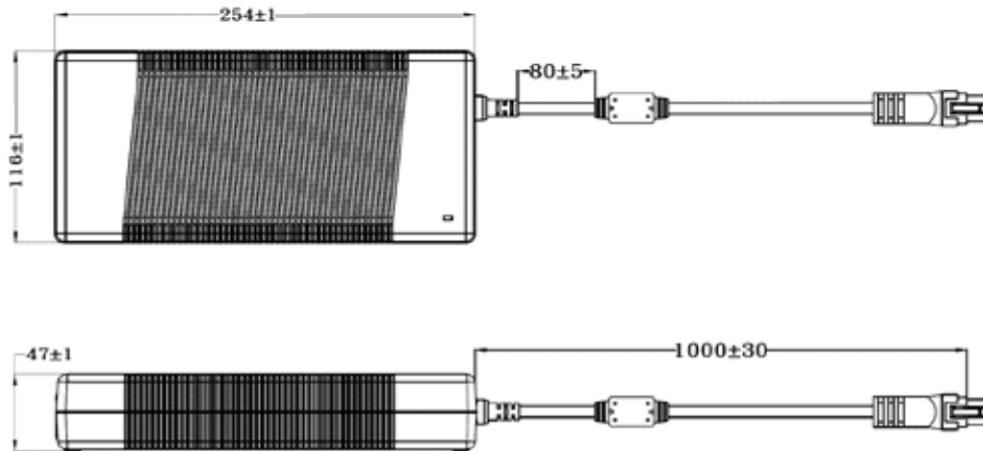

Unit: mm



●All specifications and drawings are subject to change without notice. ●Please do not use the supplied AC adapter and power supply cable for other products. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the "®" or "™" marks may not be specified. ●©2021 IDK Corporation, all rights reserved.